

Size	b ≈		h ≈		Length l ≈		For toggle clamp	
	Type V	Type H	Type V	Type H	Type V	Form H	GN 810.1, GN 810.4	GN 820.1, GN 820.4
130	41,6	48,5	56	53	52	48	130	130
230	45,9	51,9	59	59	53	50	230	230

Specification

Retaining bracket / Retaining plate

Stainless steel AISI 304

Setting nuts

Stainless steel AISI 304

Socket cap screws / Washers / Nuts

Stainless steel

Proximity sensor at identification no. 1

• Housing, stainless steel AISI 304

• Inductive, 3-pole, PNP contact

• Thread M8 x 1

• Operating temperature -25 °C to +80 °C

RoHS

Accessory	Page
GN 330 Cables with Connector Coupling (3-pole, 2 or 5 meters long)	QVX

Sensor holders GN 801.4 are designed as accessories for GN 810 and GN 820 series toggle clamps and enable contactless monitoring of the clamping positions using an inductive sensor.

When the clamping lever is in clamping position, the sensor electronics provide a high signal, e.g. to a machine control unit, and additionally indicate this switch status with an LED on the sensor.

Operating errors can thus be reliably detected and process reliability increased.

The sensor holder can be retrofitted to toggle clamps and mounted on the right or left, depending on the installation situation of the toggle clamp. All parts are supplied unmounted as a set. The proximity sensor is not included in the scope of delivery of identification no. 2.

see also...	Page
GN 810.1 Toggle Clamps (Vertical Operating Lever)	QVX
GN 810.4 Toggle Clamps (Vertical Operating Lever with Locking Mechanism)	QVX
GN 820.1 Toggle Clamps (Horizontal Operating Lever)	QVX
GN 820.4 Toggle Clamps (Horizontal Operating Lever with Locking Mechanism)	QVX
GN 801.3 Sensor Holder (for Toggle Clamps with Horizontal Mounting Base)	QVX

Technical Information	
General Information for Toggle Clamps	QVX
Stainless Steel Characteristics	QVX

How to order

1


2

3






GN 801.4-230-H-1

1	Size
2	Type
3	Identification no.

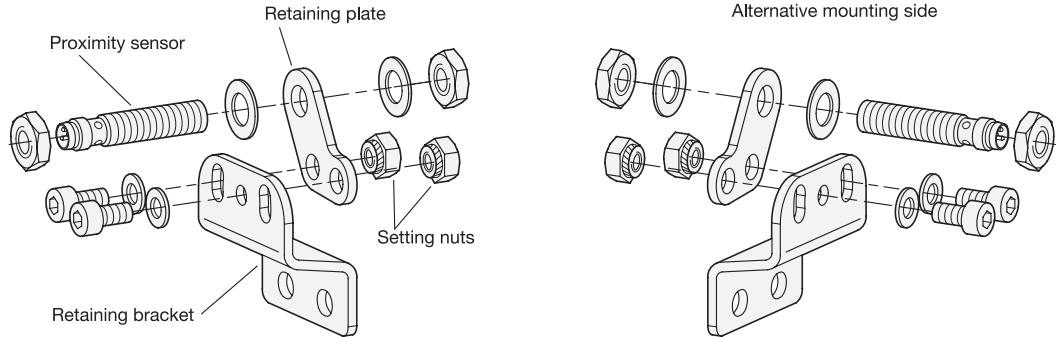Assembly Instruction

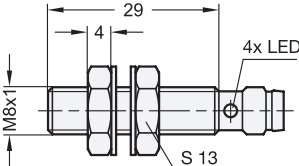

Sensor holders can be mounted on the left or right of the toggle clamp. To do this, the setting nuts must be tightened on the left or right of the retaining plate, to secure them against rotation and loss. This facilitates the further assembly of the sensor holder and the adjustment of the sensor. Subsequent changing of the mounting side is not intended. The sensor is inserted into the bore in the retaining bracket according to the selected mounting side and the depth is adjusted and fastened using the nuts in such a way that the clamping lever reliably switches it in the clamping position.

Electrical properties of the inductive proximity sensor			
Output function	Normally open (NO)		
Output type	PNP		
Supply voltage	10 ... 36 V DC		
Continuous current I _a	≤ 150 mA		
Connection type Connector	3-pole connector M8x1		
Protection type	IP 67		
Switching frequency	Max. ≤ 2.000 Hz		
Power consumption	≤ 16 mA		
Voltage drop	≤ 2,5 V		
Protection class	III		
Switching distance S _n	2 mm		
Operating temperature	-25 °C ... +80 °C		
Shock and vibration resistance	30 g, 11 ms / 10 ... 55 Hz, 1 mm		
EMC	According to EN 60947-5-2		
Reverse polarity protection	Yes		
Short-circuit protection	Yes		
Activation impulse suppression	Yes		
Approvals, conformity declarations CE marking UL	<div></div>		