


Installation

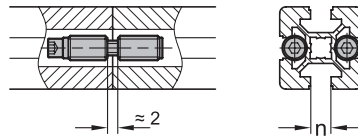


2 Profile type

- L Light
- S Heavy

3 Coding

- S End face connection

Use

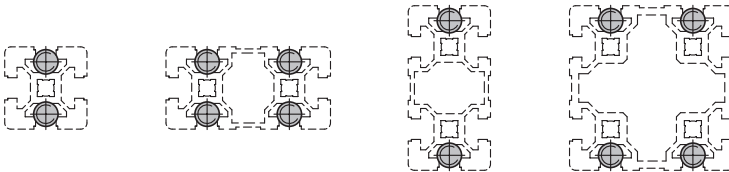

n		Bundle Pieces	d <sub>1</sub> Self-forming thread		d <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>	A/F <sub>1</sub>	A/F <sub>2</sub>
Profile type L	Profile type S		Profile type L	Profile type S					
-	8	4	-	S 11	M 6	32	26	5	T40
10	10	4	S 13*	S 12	M 8	36	26	6	T50

\* For aluminum profiles with grid dimension 40 light, connectors for profile type heavy must be used.

Specification

Steel, zinc plated, blue passivated  
RoHS



SZ

Automatic connectors GN 23b fasten aluminum profiles together on the end faces to extend them while securing them against twisting. Machining of the profile is not necessary.

For assembly, first insert the socket cap screw along the slot and then screw in the lightly lubricated threaded bushings. Minor burr formation is possible. Automatic connectors are used in pairs opposite each other. If panels are used in the slot, they must be suitably pocketed.

Automatic connectors are supplied in bundles. The table shows the quantity included in each bundle.

see also...

	Page
GN 10b Aluminum Profiles (Profile Type Light)	QVX
GN 10b Aluminum Profiles (Profile Type Heavy)	QVX

Technical Information

Mounting information	QVX
----------------------	-----

How to order

1	n
2	Profile type
3	Coding
4	Material / Finish
5	Bundle

GN 23b-8S-S-SZ-4