


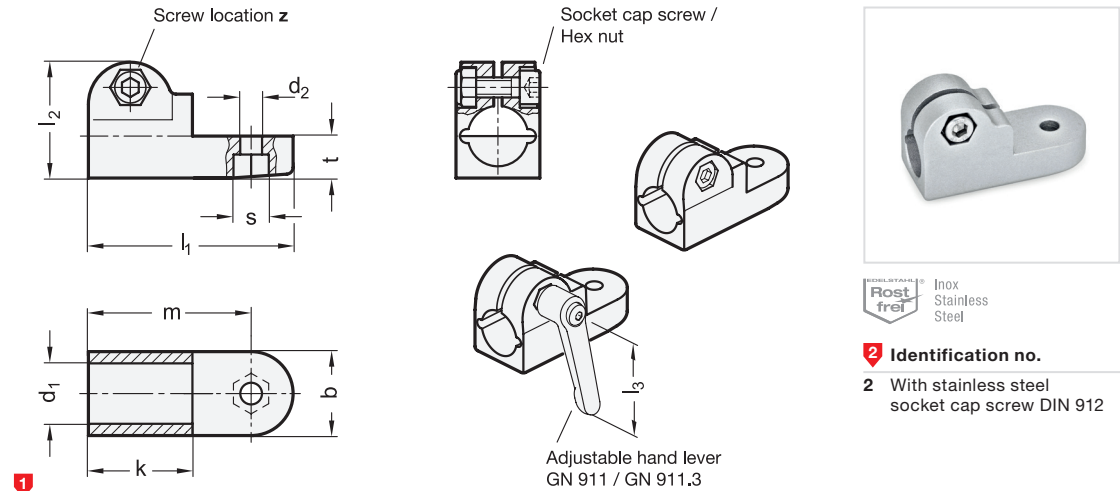

Identification no.
2 With stainless steel socket cap screw DIN 912

Table with 15 columns: d1 Bore (Aluminum, Stainless steel), b Swivel width, d2, k, l1, l2, m, s, t, z Screw location, and two columns for Accessory Recom. hand lever for z (GN 911 for aluminum l3, GN 911.3 for SST l3). Rows list specifications for Bore sizes B 12 to B 20.

Specification

- Aluminum
- Powder coated
Black, RAL 9005, textured finish
- Plain, matte shot-blasted
Stainless steel AISI CF-8
Matte shot-blasted
Socket cap screws DIN 912
Stainless steel AISI 304
Hex nuts DIN 985
Stainless steel AISI 304
Self-locking via polyamide ring
Stainless Steel Characteristics -> Page 2166
RoHS

Accessory

- Adjustable Hand Levers GN 911 / GN 911.3 -> Page 1784 / 1785

Information

The clamping bore of swivel clamp connectors GN 275 is mechanically machined and designed for construction tubes GN 990 or DIN 2391, DIN 2395 and DIN 2462.
At the screw location z, the socket cap screw reduces the bore cross-section for clamping.
For clamping without tools, the socket cap screw can be replaced by an adjustable hand lever GN 911 / GN 911.3 listed in the table as accessory.
Swivel clamp connectors GN 275 can be combined with swivel clamp connectors GN 271, GN 273 or GN 277 to swivel clamp connector joints.
see also...
Construction Tubes GN 990 -> Page 1835
Retaining Rods / Tubes GN 480.1 -> Page 1833
Swivel Clamp Connector Joints GN 281 (Assembly of GN 275 with GN 271) -> Page 1763
Swivel Mounting Clamps GN 482 -> Page 1797

How to order (Aluminum)
1 d1
2 Identification no.
3 Finish
GN275-B18-2-SW
How to order (Stainless steel)
1 d1
2 Identification no.
3 Material
GN275-B15-2-NI