




Identification no. 2



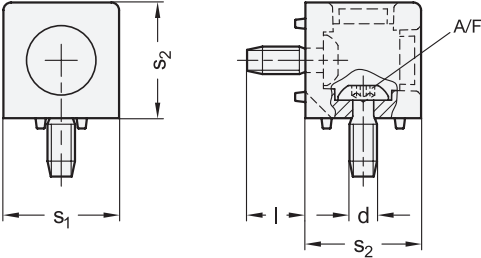

Identification no. 3

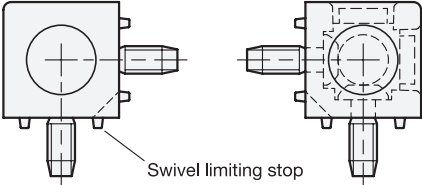

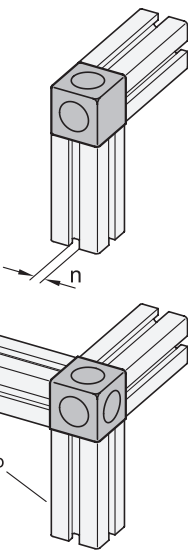Application examples







Identification no.

2 Connecting 2 profiles

3 Connecting 3 profiles

Type

C With fastening set

1

2

3

S ₁	S ₂	n	d Self-forming thread	Length l ≈	A/F	Tightening torque in Nm
30	30	8	S 8	21	5	25
45	45	10	S 12	24	T50	35

Specification		<div>6</div>	<div>7</div>	<div>8</div>
Housing				
Aluminum, plain finish	AB			
Screws				
Steel, zinc plated, blue passivated	SZ			
Cover caps				
Plastic, Polyamide (PA)				
Black	● S			
RoHS				

Cube connectors GN 33b fasten two or three aluminum profiles together on their end faces, at right angles and with anti-twist protection. Machining of the profile is not necessary.

The self-forming thread of the screws should be lubricated to facilitate assembly. The end faces of the aluminum profiles are covered by the cube connectors, which ensures a visually appealing appearance.

If panels are used in the slot, they must be given a suitable corner chamfer.

see also...	Page
GN 10b Aluminum Profiles (Profile Type Light)	QVX
GN 10b Aluminum Profiles (Profile Type Heavy)	QVX

Technical Information	
Plastic Characteristics	QVX

How to order	1	S ₁
	2	S ₂
	3	n
	4	Identification no.
	5	Type
	6	Finish housing
	7	Material / Finish screws
	8	Color of the cover cap

1

2

3

4

5

6

7

8

GN 33b-454510-2-C-ABSZS