


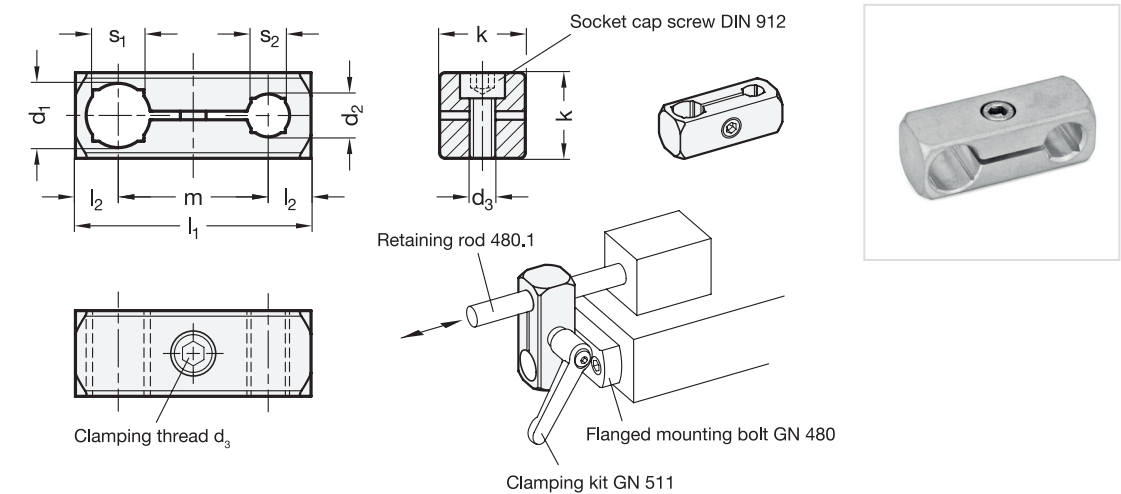

1 d₁ Bore for shaft tol. h11	2 d₂ Bore for shaft tol. h11	d₃ Clamping thread	k	l ₁	l ₂	m	s₁ Square	s₂ Square	Clamping kits for d ₃ 
B 8	B 8	M 4	14	38	7	24	-	-	GN 511-M4-14
B 10	B 8	M 5	16	44	8	28	8	-	GN 511-M5-16
B 10	B 10	M 5	16	44	8	28	8	8	GN 511-M5-16
B 12	B 8	M 5	16	45	8	29	10	-	GN 511-M5-16
B 12	B 10	M 5	16	45	8	29	10	8	GN 511-M5-16
B 12	B 12	M 5	16	45	8	29	10	10	GN 511-M5-16
B 15	B 10	M 6	20	55	10	35	12	8	GN 511-M6-20
B 15	B 12	M 6	20	55	10	35	12	10	GN 511-M6-20
B 15	B 15	M 6	20	55	10	35	12	12	GN 511-M6-20
B 16	B 10	M 6	20	55	10	35	-	8	GN 511-M6-20
B 16	B 12	M 6	20	55	10	35	-	10	GN 511-M6-20
B 16	B 15	M 6	20	55	10	35	-	12	GN 511-M6-20
B 16	B 16	M 6	20	55	10	35	-	-	GN 511-M6-20
B 20	B 12	M 6	25	66	12,5	41	16	10	GN 511-M6-25
B 20	B 15	M 6	25	66	12,5	41	16	12	GN 511-M6-25
B 20	B 16	M 6	25	66	12,5	41	16	-	GN 511-M6-25
B 20	B 20	M 6	25	66	12,5	41	16	16	GN 511-M6-25

Specification

- Aluminum
 - Matte finish, tumbled
 - Black anodized
- Socket cap screws DIN 912
Stainless steel AISI 304
- ISO Fundamental Tolerances → Page 2151
- Stainless Steel Characteristics → Page 2166
- RoHS

Accessory

- Clamping Kits GN 511 → Page 1804

Information

In the standard version, the clamping screw is a socket cap screw with hexagonal socket DIN 912. It can be replaced by a clamping kit GN 511 (article code see table of dimensions).

see also...

- Retaining Rods / Retaining Tubes GN 480.1 → Page 1833
- Two-Way Mounting Clamps GN 174 → Page 1808
- Twistable Two-Way Mounting Clamps GN 490 → Page 1774
- Two-Way Connector Clamps GN 131 → Page 1718

How to order	1	d ₁
	2	d ₂
	3	Finish
GN 474.1-B12-B12-ELS		