


**Application example**

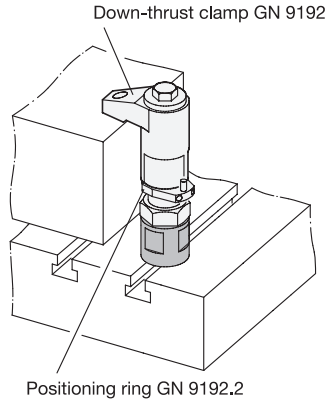

<b>1</b> $d_1 -0,1$	<b>2</b> $d_2$	<b>3</b> $h_1 \pm 0,01$	$h_2$	Length <b>l</b>	<b>A/F</b>
25	M 8	20	10	20	22
25	M 8	40	20	25	36
40	M 12	35	20	30	36
40	M 12	70	20	35	36

**Specification**

**Height adjusting cylinder**

- Steel
- Case-hardened
- Blackened

**Grub screw DIN 913**

Steel, blackened

RoHS

Height adjusting cylinders GN 9192.3 are used to increase the clamping height of down-thrust clamps GN 9192.

Height adjusting cylinders can also be used in combination with positioning elements and clamping pads to position contact points at a greater distance from the reference surface.

**see also...**

	<b>Page</b>
<b>GN 9192</b> Down-Thrust Clamps	QVX
<b>GN 9192.2</b> Positioning Ring	QVX
<b>GN 709.1</b> Clamping Pads	QVX
<b>GN 709.3</b> Clamping Pads	QVX
<b>GN 408.1</b> Positioning and Supporting Elements	QVX
<b>GN 409.1</b> Positioning Elements	QVX

**How to order**

**GN9192.3-40-M12-70**

<b>1</b>	$d_1$
<b>2</b>	$d_2$
<b>3</b>	$h_1$

